


ZIBO JINGGAN REFRACTORY IMPORT AND EXPORT CO.,LTD

Address:NO. 3, Yanhe Road, Boshan, Zibo, Shandong, China
Email:wp@cnjingganrefractory.com/sdwenping@163.com
Contact:Rose Tel/Wechat:+86-13275332819
Tel:86-533-4188518 Fax:86-533-4188518

High Density Polyethy Board

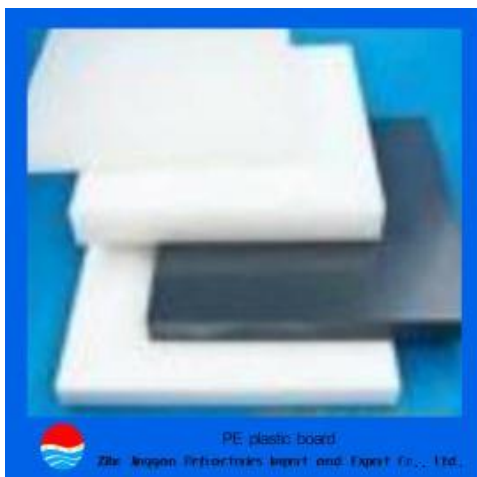

1, characteristics of High Density Polyethy Board

- 1) Good environmental protection, odorless and nontoxic
- 2) Good temperature resistance, can be used at $-70^{\circ}\text{C} \sim -100^{\circ}\text{C}$
- 3) Good chemical stability, insoluble in general solvents at room temperature, resistant to most acid and alkali corrosion
- 4) Low water absorption and water vapor permeability
- 5) Good electrical insulation
- 6) Low density, good toughness, relative density 0.941-0.960
- 7) Various colors, mainly white

2. Scope of application: chemical, mechanical, electrical, packaging, food and other industries, such as material package lining plate, anti-collision plate, wear-resistant block, guide plate, impeller, floor

3. Main parameters of High Density Polyethy Board :

ITEM	UNIT	TECHNCIAL INDEX
Density	g/cm3	0.93
Water absorption rate	%	<0.01
Flame retardancy		B1 grade
Wear resistance		good

ZIBO JINGGAN REFRACTORY IMPORT AND EXPORT CO.,LTD

Antistatic property		good
Tensile strength	Mpa	>36

4. Specification of High Density Polyethy Board:

2000*1000*2~150mm or 2440*1220*2~30mm

5. Good feedback of product use effect, the products have been exported to Australia, Mexico, and India.

6. We are a professional supplier, who can provide customers with free product technology, use and other issues.

Do you want to find a professional supplier of refractory products?

Do you want to find a professional supplier of graphite electrodes?

Do you want to find a stable and credible supplier?

Then let's contact with jinggan company

Contact me:

Email: wp@cnjingganrefractory.com / sdwenping@163.com

TEL: 86-0533-4188518 / FAX: 86-0533-4188518

Rose: +86-13275332819 (wechat/whatsapp number)